



LYNDON HARROWS

THE LARGEST RANGE OF AGRICULTURAL HARROWS IN NZ – DESIGNED & BUILT TO LAST

LYNDON HARROWS AND ENGINEERING LIMITED

"INSIST ON A LYNDON HARROW"


LYNDON CHAIN HARROW

Designed to eliminate excessive wear these harrows are suitable for direct drilling, over sowing, light levelling and spreading horse or cattle manure. Rear spreader bar helps self-cleaning action and square section helps cut manure while the angle design spreads and smooths manure evenly.

Round interlocking joining links mean less wear. Ideally suited for use behind discs and grubbers.

Available in:

- 10mm Square and 12mm Square Steel
- 1.5m (5ft), 1.8m (6ft), 2.1m (7ft) - all suitable for Motorcycles
- 10mm, 12mm, 16mm and 20mm Square Steel
- 2.4m (8ft), 2.7m (9ft), 3.0m (10ft), 3.3m (11ft), 3.6 (12ft), 4.2 (14ft)
- Available 5 or 7 rings deep

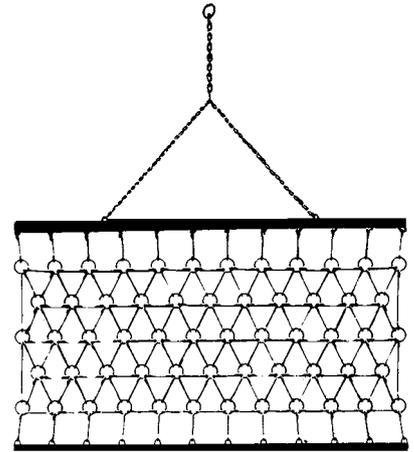


LYNDON SPIKED CHAIN HARROW

Standard model comes with bars and the spiked chain harrow. Rotating rings means less wear. Spikes for pasture rejuvenation and manure spreading can be utilised for seed covering.

Available in:

- 12mm round - 6'x6', 8'x6', 10'x6', 11'x6', 12'x6', 10'x8', 12'x8'
- 16mm round - 8'x8', 10'x8', 12'x8', 14'x8'
- 20mm round - 8'x8', 10'x8', 12'x8', 14'x8'
- Heavy duty draw bar. Rear spreader bar or weights optional.
- 24mm round contractors harrow - 8'x8', 9'x8', 10'x8', 12'x8', 14'x8'

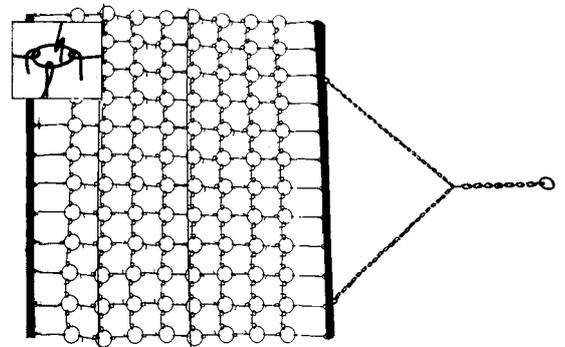


COMBO HARROW

All these harrows are suitable for many applications such as spreading manure from horses and cattle, removing twitch and dead grass, for relieving, compacting and pugging in fields, lawns and horse arenas. Also great for over sowing and light levelling.

Available in:

- 12mm and 16mm Combo – 2.4m (8'), 3.0m (10'), 3.6m (12'), 4.2m (14')

Inbetween sizes available, please contact us for a quote.

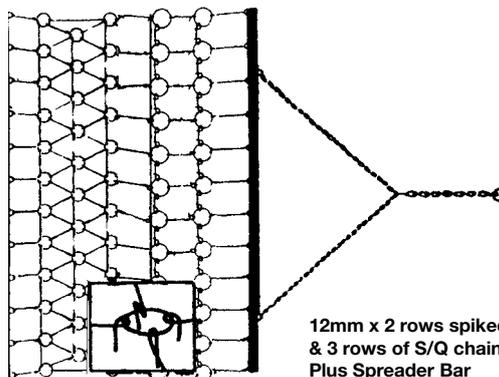

12mm x 2 rows spiked H/T & 3 rows of S/Q chain Plus Spreader Bar

Conversion Chart

metres	feet
1.5	5
1.8	6
2.1	7
2.4	8
2.7	9
3.0	10
3.3	11
3.6	12
4.2	14

The Imperial sizes shown are the closest equivalent to the actual metric sizes.


COMBINATION HARROW

Spiked Chain and Lyndon Chain Harrows make a combination set with many uses. Available in any combination of Spiked Chain and Lyndon Chain Harrows. Comes with detachable Lyndon Chain. Very well suited for manure spreading. Can also be used for cultivation work and broadcast seed covering. The two sets are detachable for use as individual sets or used combined as a whole.

Available in:

2.7m (8') , 3.0m (10'), 3.6m (12')
 12mm Round and 10mm Square
 12mm Round and 12mm Square
 16mm Round and 12mm Square
 16mm Round and 16mm Square

We can also supply other combinations, sizes and widths, please contact us for a quote.

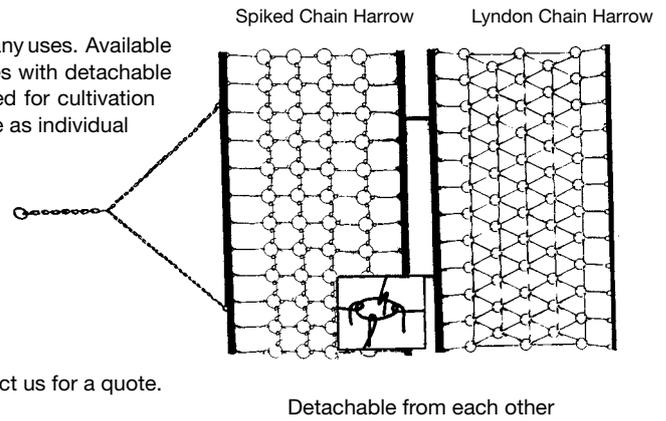


TRIPOD AND LYNDON CHAIN HARROWS

Designed for pasture rejuvenation, two harrows in one. Comes with Tripod in front to dig and rip up dead grass and has a detachable Lyndon Chain Harrow behind to smooth and level. Excellent for dethatching Kikuyu grass. Detach and use the Lyndon Chain Harrow from the back to smooth and spread manure without digging up your ground. Designed to eliminate excessive wear and bolted construction with Nylock nuts which can be replaced when worn. The tynes on the Tripod are hardsurfaced and are reversible.

Available in:

10mm, 12mm and 16mm Square Chain
 2.7m (8') , 3.0m (10'), 3.6m (12'), 4.2m (14')

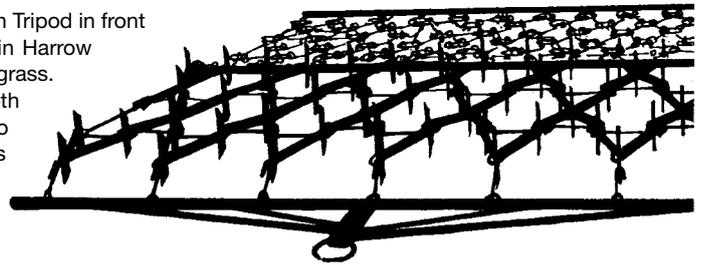


ROUND RING HARROW

These harrows are suitable for rough stoney ground. Also ideal for trashy soils as they will feed trash through the ring as they rotate rather than collecting and dragging. A variety of the 12mm sets are well suited to seed covering in stoney or trashy ground. Wear is minimised due to the rings constantly rotating eliminating wear on one section of the ring. Great for levelling and breaking up ground after chisel ploughs, grubbers or discing. Can be made any width or depth to suit individual needs.

Available in:

Round Ring Harrow
 12mm round ring material - 8'x3', 9'x3', 10'x3', 11'x3', 12'x3'
 16mm round ring material - 8'x6', 9'x6', 10'x6', 11'x6', 12'x6'

Round Ring Contractor's Harrow, HD Bars, H/D Chain Tow
 20mm round material - 8'x8', 9'x8', 10'x8', 12'x8', 14'x8'
 24mm round material - 8'x8', 9'x8', 10'x8', 12'x8', 14'x8'

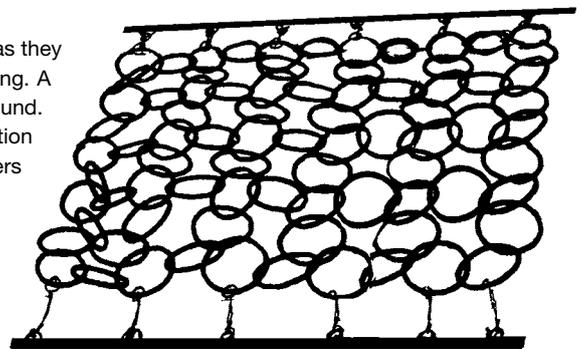


HORSE TRAINING TRACK HARROWS

Blade type harrows which cut into hard tracks. Strengthened frame design. Replaceable tynes. Can be drawn on their own or attach a Chain Harrow behind for levelling.

TYNES - Bolt on 320 x 70 x 12 Flat Hardened Steel.

Available in:

2 Leaf and Bar, 3 Leaf and Bar

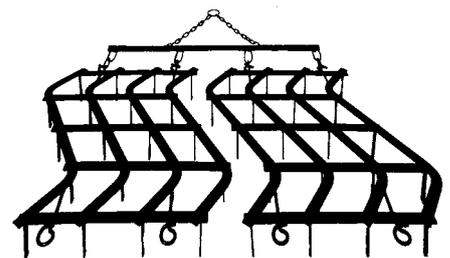


UTILITY HARROWS

The ultimate small seed Chain Harrow which has been designed to eliminate excessive wear. Hinged two piece rear spreader bar helps self-cleaning and aids contour following. Constant ground contact follows land contours, adjustable chain tow points and strong, light construction. Available in any width or length, standard models are 3 ring deep.

Available in:

10mm, 12mm and 16mm diameter
1.8m (6ft) to 4.2m (14')

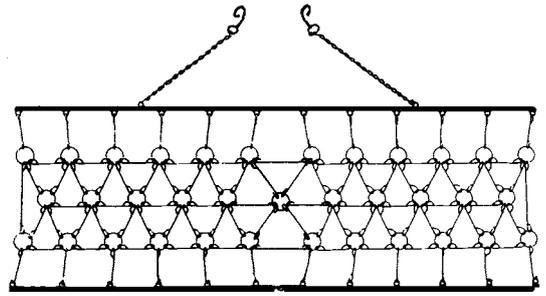

3.0m (10'0") Suit 18 run Drill
3.3m (10'9") Suit 20 run Drill

DRILL HARROWS


Self-cleaning harrows of strong, no maintenance design. 16 tynes per leaf, 50mm tyne spacing's. Designed to give even ground pressure on all tynes and adjustable draw bar towing chains. Leaves are available 3 wide or 4 wide and can be mixed and matched to suit specific widths.

Available in:

Light weight, 10kg leaf 30x5 flat
4 row per leaf
3 row per leaf
Bars
3.5mm wide 4 leaf and bar, suit 20 run drill
3.2mm wide, suit 18 run drill.


Medium weight, 19kg leaf 32x8 flat
4 rows per leaf, suit 20 run drill
3 rows per leaf, suit 18 run drill
Bars

Heavy weight 22kg 30x10 flat
4 rows per leaf, suit 20 run drill
3 rows per leaf, suit 18 run drill
Bars

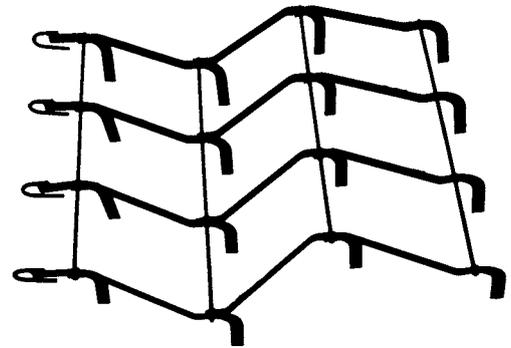


STUMP JUMP SELF-CLEANING HARROWS

Fixed or detachable towing points, pigtails or permanent attachment on bar. Rugged construction allows for use on stoney ground behind chisel ploughs and grubbers, this is a real back country harrow. Self cleaning. Well suited to be mounted in front of a Cambridge Roller. Can also be fitted to a Lyndon Hydraulic Folding Frame.

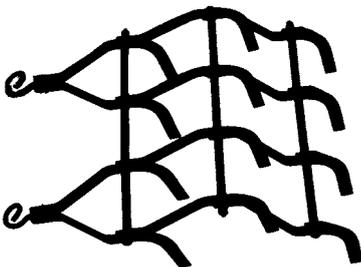


Available in:

4 row wide, 3 deep, 30kg per leaf
40 x 10 flat and 50 x 10 flat

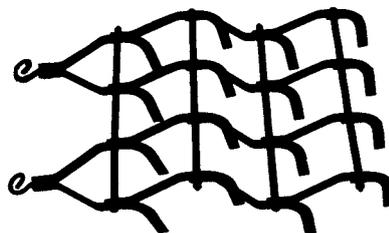

Available in:

4 row wide, 4 deep, 40kg per leaf
40 x 10 flat and 50 x 10 flat

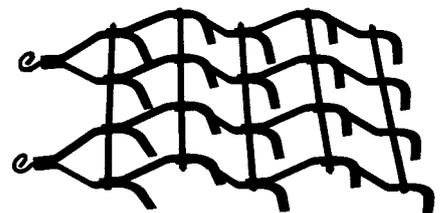

Available in:

4 row wide, 5 deep
40 x 10 flat, 53kg heavy per leaf
50 x 10 flat, 63kg super heavy per leaf

Draw Bars - 3, 4 and 5 leaf bars available


“INSIST ON A LYNDON HARROW”

DIAMOND HARROWS

These harrows are heavier and stronger in the frame design than Zig Zags. Due to the closer pattern these harrows can be prone to blockaging making them more suitable to lighter soils. Sturdy and well-constructed harrows with tow hooks at both ends. Well suited to mounting in front of the Cambridge Roller. Can also be fitted to a Lyndon Hydraulic Folding Frame.

Available in:

16mm (5/8") Tyne, 20mm (3/4") Tyne

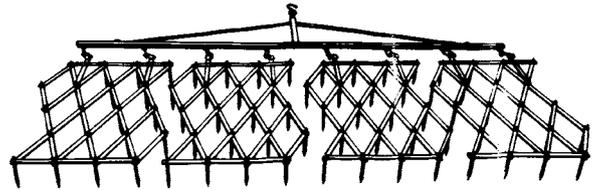


ZIG ZAG HARROWS

Open frame pattern helps to minimise blockages with stones or big clods. Sturdy and well-constructed harrows with tow hooks at both ends. Well suited to mounting in front of the Cambridge Roller. Can also be fitted to a Lyndon Hydraulic Folding Frame.

Available in:

35kg 16mm (5/8") Tyne, 45kg 20mm (3/4") Tyne

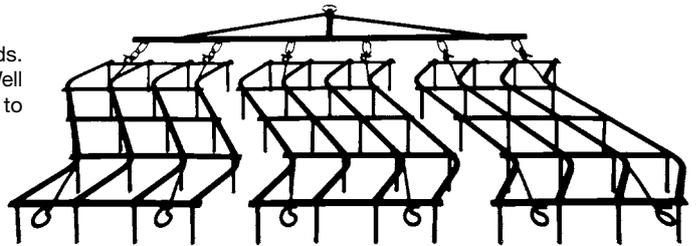

ZIG ZAG HARROW SETS

Available in:

3 Leaf and Bar 3.100m overall
4 Leaf and Bar 4.050m overall
5 Leaf and Bar 5.095m overall

ZIG ZAG BARS

Available in:

3 Leaf, 4 Leaf, 5 Leaf
Also available in wider configuration with a master bar.

HYDRAULIC FOLDING HARROW FRAMES

Designed and constructed with strength and simplicity in mind these Lyndon Hydraulic Folding Frames help cover large acreages rapidly. Currently available 6-9 metres wide, these frames are built to carry any of our range of leaf harrows and can easily be fitted with a selection of chain harrows. Easy to maintain and will give trouble free service year after year.

AERATION RIPPER

Suitable for many uses including:

- Remove pugging from cattle movements
- Access to restrictive or closed in spaces such as gates, fence lines, vine rows and tree lines.
- Provide aeration as part of cultivation or pasture improvement process.

- Standard width size 1800, 2400 and 3000mm. Custom widths POA
- Three point linkage as standard
- Single row or twin row of adjustable depth tynes. (Standard tyne depth to 120mm)
- Once tynes are worn, other end can then be used for long-life benefits.
- Easy to adjust skid supports, strongly built Lyndon frame
- Option for rear hooks to tow a chain harrow if needed for improved spreading



Also available

PEA HARROW
POTATO HARROW
ORGANIC WEED HARROW

Spare Parts available for all harrows

Chain Harrow and Spike Links
Double Links - 12mm round, 16mm round
Hooks available

We will design, manufacture, any Harrow to order - **Please call us today for a quote**



LYNDON ENGINEERING
& HARROWS

Box 270 Kirwee 7543, Canterbury, New Zealand
Phone: 0800 HARROWS **Fax:** (03) 347 8516
Email: info@lyndonharrows.co.nz